

1. Connect components

Multipin

PowerCon TRUE1 **SOCAPEX**

**Do not power on during step 1*

AES3 XLR **Analog XLR**

ANALOG INPUTS **AES INPUTS**

Ethernet / EtherCon

**Keep network isolated - Use only PK devices on this network*

2. Plug in Signal Cell (EdgeRouter & Switch)

**Use only 1 router in your Network*

3. In .dynamics, select network card and check for 172.16.*.* IP address

4. Power on sources, 1 by 1


Wait for .dynamics to show modules

0 Online

➔

36 Online

5. Click Discovery in "System" -> "Online"

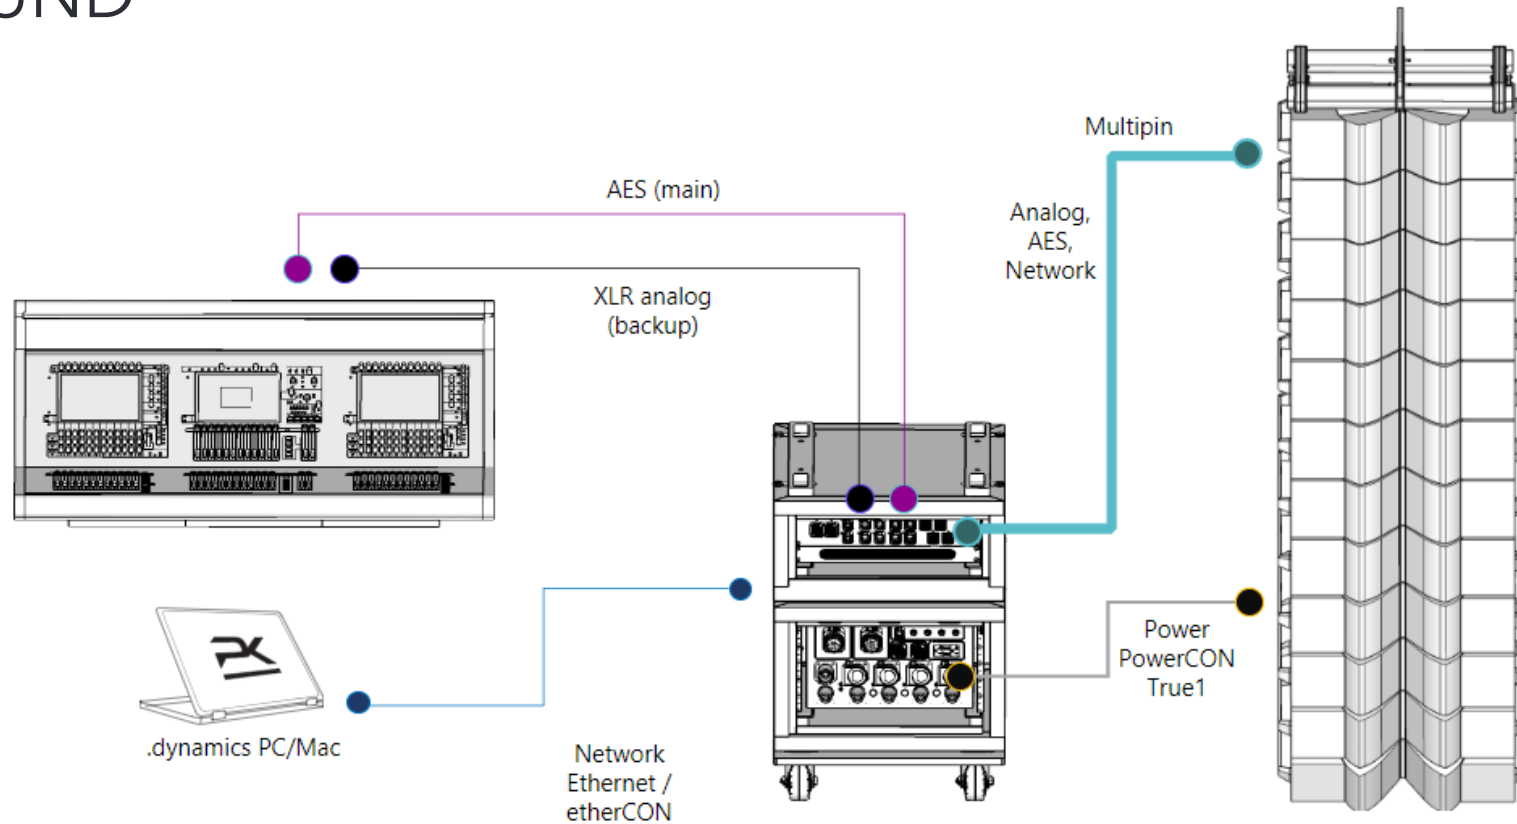

Checking Network Card IP address:

- For a Windows PC, this can be found by opening the "Start" menu, typing "ncpa.cpl," and pressing "Enter." Double click the network card being used and click "Details..." to view the IP address.
- For a Mac, this can be found in System Preferences > Network, then Select the network card being used to view the IP address.